

Specification

Material:

Contact Material: C2680
Contact plating: Au or Sn Over30-50u" NI
Insulator Material: Black Polyester UL94V-0
Standard: PBT/PA6T/PA9T/LCP + 30%G.F

Electrical:




Current rating: 3.0Amps/contact max.
Contact resistance: $\leq 20m\Omega$ /contact
Insulation resistance: $\geq 1000M\Omega$ at V=100V
Withstanding Voltage: 1000V AC/minute

Mechanical:

Operating temperature: -40°C to +105°C
Wave soldering temperature: 255 \pm 5°C, 10s

FH 254 V B - NP - P0 BK G 02
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Category: FH-Female Header
- ② Pitch: 254-Pitch 2.54mm
- ③ Appearance: V- Straight 180°
- ④ Feature Type: B-B TPYE(弹片U型)
- ⑤ Circuit No.: 02-02PIN,03-03PIN...
- ⑥ Material: P0-PBT UL94V-0; 6T-PA6T UL94V-0
- ⑦ Color: BK-Black
- ⑧ Finish: G-Gold Flash
- ⑨ Option: 02-H8.5 Plastic high(塑高)/2.4Plastic wide(塑宽)

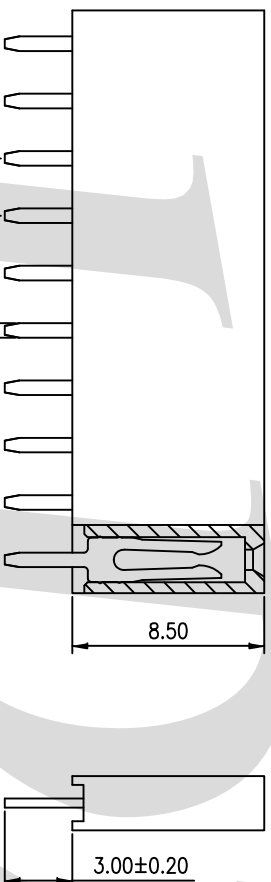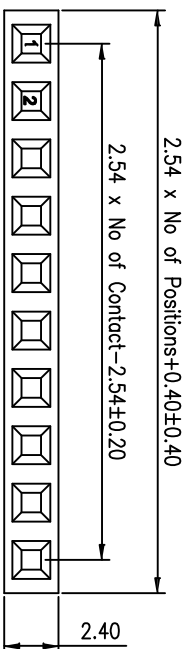

P.C.B LAYOUT

日期 DATE	旧版本 OLD REV	新版本 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT	一般公差 GENERAL TOLERANCE	LDZY DongGuan LDZY Electronics CO.,LTD.	料号 PART NO	品名 TITLE	单位 UNIT	比例 SCALE	图号 NUMBER	版次 REV
							.X ±0.3 .XX ±0.2 .XXX ±0.1		FH254VB-NP-P0BKG02	2.54mm Female Header (B TYPE/8.5H)	MM	1/1	LDZY-8221	A